



High-Tech Enterprise



烨柏®



Professional - Quality - Benefit

B008 Torque Arm - BZ

BZ Series Linear Arm



Basic-Advanced



Basic-Economic

Patent Certificate

Number:

ZL201430313796.7

ZL201520628070.1

ZL201530075203.2

ZL201530310759.5

ZL201630486987.2

ZL201630475999.5



Double Column



TPS Positioning





High-Tech Enterprise



烨柏®



Professional - Quality - Benefit

B008 Torque Arm - BZ

		Max. Torque[Nm]		Max. Load	Ver. Stroke	Hor. Stroke	Height H	Max. Reach L	Output Width W
Model	Description	Ver.	Hor.	[Kg]	[mm]	[mm]	[mm]	[mm]	[mm]
Basic									
YBA-B008-010	Basic-Adv.	10	5	1.4	400	300	772	440	20
YBA-B008-010J	Basic-Eco.	10	5	1.4	400	300	772	440	20
YBA-B008-010B	Double Column, Adv.	15	8	0.9	400	300	784	360	20
YBA-B008-010BJ	Double Column, Eco.	15	8	0.9	400	300	784	360	20
YBA-B008-040	Basic-Adv.	40	30	2	450	500	1036	595	28
YBA-B008-040J	Basic-Eco.	40	30	2	450	500	1036	595	28
YBA-B008-040B	Double Column, Adv.	50	35	3.6	450	500	1048	705	28
YBA-B008-040BJ	Double Column, Eco.	50	35	3.6	450	500	1048	705	28
YBA-B008-080	Basic-Adv.	80	40	2.3	500	500	1086	745	32
YBA-B008-080J	Basic-Eco.	80	40	8.3	500	500	1087	745	32
YBA-B008-080B	Double Column, Adv.	90	50	2	500	500	1101	595	32
YBA-B008-150	Basic	150	100	13.1	500	500	1186	785	40
YBA-B008-150B	Double Column	180	120	11.5	500	500	1201	670	40
YBA-B008-500	Basic	500	250	21.6	500	500	1336	810	50
YBA-B008-500B	Double Column	600	300	18	500	500	1353	645	50
YBA-B008-1000	Basic	1000	500	30	500	500	1336	810	50
YBA-B008-1000B	Double Column	1000	500	40	500	500	1336	810	50
TPS Positioning, X/Y									
YBA-B008-010P	TPS-Adv	10	5	1.4	400	300	772	440	20
YBA-B008-010PJ	TPS-Eco.	10	5	1.4	400	300	772	440	20
YBA-B008-040P	TPS-Adv	40	30	2	450	500	1095	595	28
YBA-B008-040PJ	TPS-Eco.	40	30	2	450	500	1056	595	28
YBA-B008-080P	TPS-Adv	80	40	2.3	500	500	1145	745	32
YBA-B008-080PJ	TPS-Eco.	80	40	8.3	500	500	1067	745	32
YBA-B008-150P	TPS-Adv	150	100	13.1	500	500	1245	770	40
YBA-B008-500P	TPS-Adv	500	250	21.6	500	500	1295	810	50
YBA-B008-1000P	TPS-Adv	1000	500	30	500	500	1245	770	50
TPS Positioning, X/Y/Z									
YBA-B008-010ZP	TPS-Adv	10	5	1.4	400	300	772	440	20
YBA-B008-010ZPJ	TPS-Eco.	10	5	1.4	400	300	772	440	20
YBA-B008-040ZP	TPS-Adv	40	30	2	450	500	1095	595	28
YBA-B008-040ZPJ	TPS-Eco.	40	30	2	450	500	1056	595	28
YBA-B008-080ZP	TPS-Adv	80	40	2.3	500	500	1145	745	32
YBA-B008-080ZPJ	TPS-Eco.	80	40	8.3	500	500	1067	745	32
YBA-B008-150ZP	TPS-Adv	150	100	13.1	500	500	1245	770	40
YBA-B008-500ZP	TPS-Adv	500	250	21.6	500	500	1295	810	50
YBA-B008-1000ZP	TPS-Adv	1000	500	30	500	500	1295	810	50

Notice:

1. Eco. Type arm equipped with Chinese local brand balancer and bearings. Adv. Type equipped with international brand balancer and bearings
2. Default TPS Positioning Arm equipped with analog type transducer. If digital type transducer, plus a letter "s" after P of the model. For example: YBA-B008-080PS, YBA-B008-080ZPSJ.



High-Tech Enterprise





烨柏®



Professional - Quality - Benefit

B008 Torque Arm - BZ

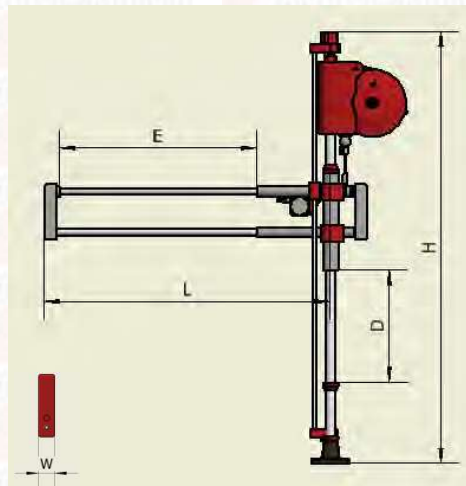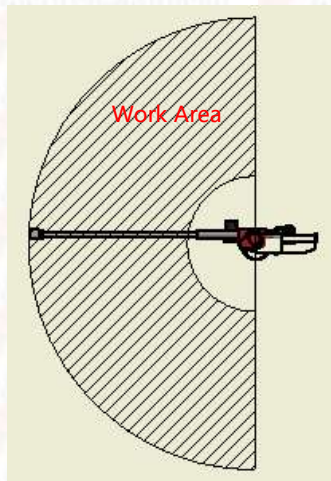

Angle Encoder

Stop Adjustable

Tool Holder

Distance Encoder

Balancer

Bearing

Mounting Bracket

Tool Holder installation

Workpiece

Table



High-Tech Enterprise



Professional - Quality - Benefit

B008 Torque Arm – TAZ

TAZ Series Linear Arm

Patent Certificate

Number:

ZL201430313796.7

ZL201520628070.1

ZL201530075203.2

ZL201530310759.5

ZL201630486987.2

ZL201630475999.5



Basic-Advanced




Basic-Economic



TPS A



TPS B

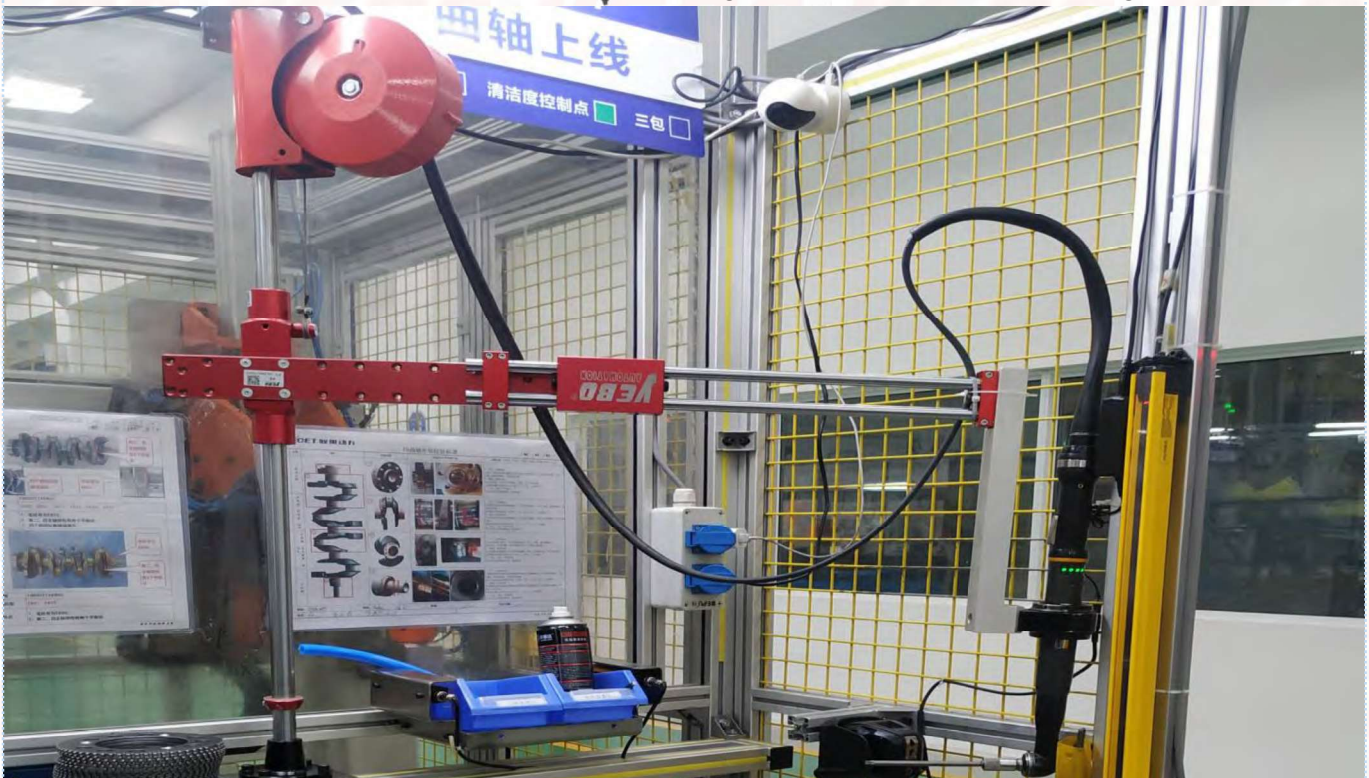



High-Tech Enterprise



烨柏®



Professional - Quality - Benefit

B008 Torque Arm – TAZ

		Max Torque[Nm]		Max. Load	Ver. Stroke	Hor. Stroke	Height H	Max. Reach L	Output Width W
Model	Description	Ver.	Hor.	[Kg]	[mm]	[mm]	[mm]	[mm]	[mm]
Basic									
YBA-B008-TA025Z1	Basic-Ecn	25	20	3.5	600	300	1028	715	20
YBA-B008-TA025Z2	Basic-Adv	25	20	1.5	500	300	1037	715	20
YBA-B008-TA050Z1	Basic-Ecn	50	35	9	500	400	1039	905	28
YBA-B008-TA050Z2	Basic-Adv	50	35	5	500	400	1034	905	28
YBA-B008-TA100Z1	Basic-Ecn	100	60	9	500	400	1041	940	28
YBA-B008-TA100Z2	Basic-Adv	100	60	7	500	400	1041	940	28
TPS, X/Y									
YBA-B008-TA025-P3A	TPS-Eco A	25	20	3	600	300	1056	715	20
YBA-B008-TA025-P3B	TPS-Eco B	25	20	3	600	300	1056	715	20
YBA-B008-TA025-P4A	TPS-Adv A	25	20	1	500	300	1095	655	20
YBA-B008-TA025-P4B	TPS-Adv B	25	20	1	500	300	1095	655	20
YBA-B008-TA050-P3A	TPS-Eco A	50	35	9	500	400	1067	905	28
YBA-B008-TA050-P3B	TPS-Eco B	50	35	9	500	400	1067	905	28
YBA-B008-TA050-P4A	TPS-Adv A	50	35	5	500	400	1095	905	28
YBA-B008-TA050-P4B	TPS-Adv B	50	35	5	500	400	1095	905	28
YBA-B008-TA100-P3A	TPS-Eco A	100	60	9	500	400	1072	940	28
YBA-B008-TA100-P3B	TPS-Eco B	100	60	9	500	400	1072	940	28
YBA-B008-TA100-P4A	TPS-Adv A	100	60	6	500	400	1095	940	28
YBA-B008-TA100-P4B	TPS-Adv B	100	60	6	500	400	1095	940	28
TPS, X/Y/Z									
YBA-B008-TA025-ZP3A	TPS-Eco A	25	20	3	600	300	1056	715	20
YBA-B008-TA025-ZP3B	TPS-Eco B	25	20	3	600	300	1056	715	20
YBA-B008-TA025-ZP4A	TPS-Adv A	25	20	1	500	300	1095	655	20
YBA-B008-TA025-ZP4B	TPS-Adv B	25	20	1	500	300	1095	655	20
YBA-B008-TA050-ZP3A	TPS-Eco A	50	35	9	500	400	1067	905	28
YBA-B008-TA050-ZP3B	TPS-Eco B	50	35	9	500	400	1067	905	28
YBA-B008-TA050-ZP4A	TPS-Adv A	50	35	5	500	400	1095	905	28
YBA-B008-TA050-ZP4B	TPS-Adv B	50	35	5	500	400	1095	905	28
YBA-B008-TA100-ZP3A	TPS-Eco A	100	60	9	500	400	1072	940	28
YBA-B008-TA100-ZP3B	TPS-Eco B	100	60	9	500	400	1072	940	28
YBA-B008-TA100-ZP4A	TPS-Adv A	100	60	6	500	400	1095	940	28
YBA-B008-TA100-ZP4B	TPS-Adv B	100	60	6	500	400	1095	940	28

Notice:

1. Eco type equipped with Chinese local brand balancer and bearings, Adv type equipped with international brand balancer and bearings
2. A type Equipped with local brand Magnetic scale, B type equipped with Balluff Magnetic scale
3. All TPS positioning arms are controlled by YBA-SPC-COM-ST012M





High-Tech Enterprise



Professional - Quality - Benefit

B008 Torque Arm – TAZ

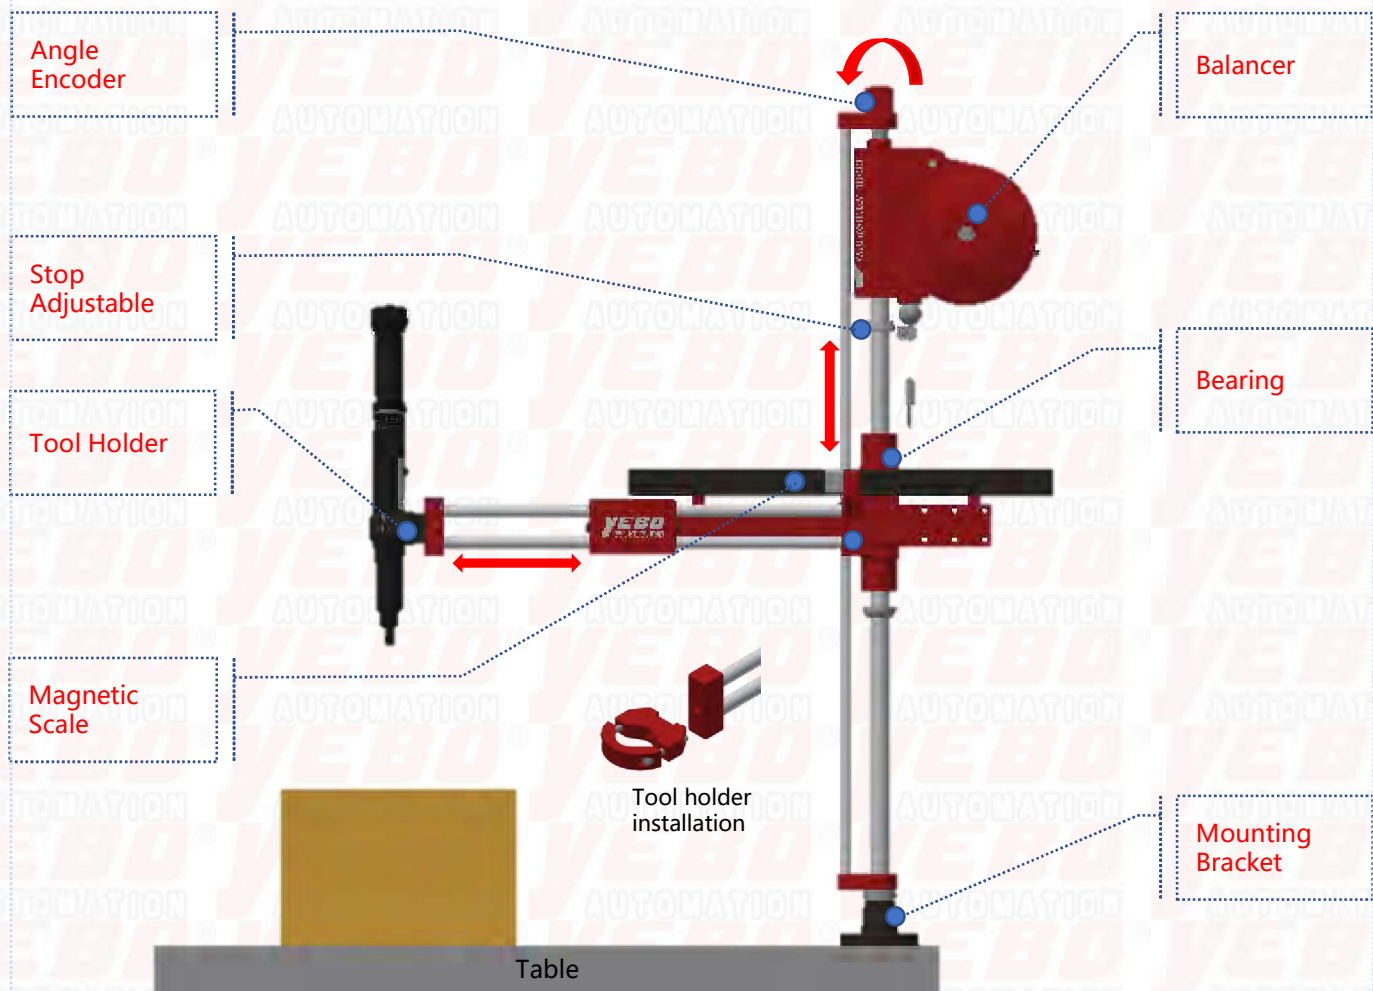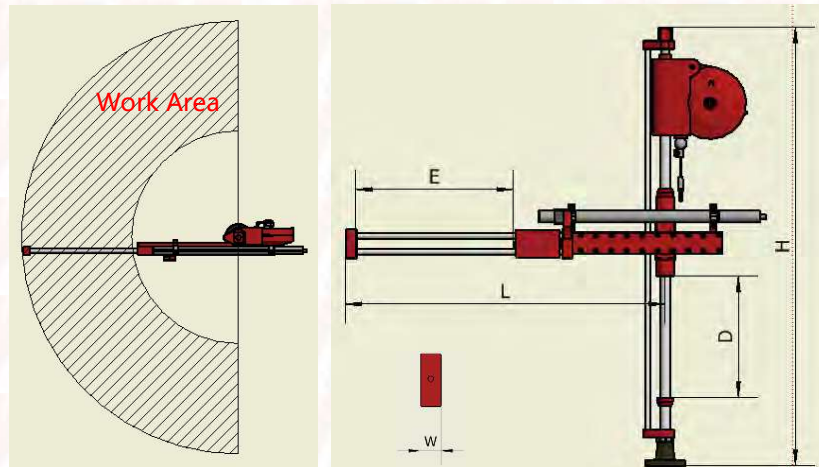



High-Tech Enterprise



Professional - Quality - Benefit

B008 Torque Arm – TAW

TAW Series Articulated Arm



Basic-Eco.



Basic-Adv.



TPS-Eco.



TPS-Adv.



Table Mounting



Top Mounting



Wall Mounting

Patent Certificate

Number:

ZL201430313796.7

ZL201520628070.1

ZL201530075203.2

ZL201530310759.5

ZL201630486987.2

ZL201630475999.5





High-Tech Enterprise



烨柏®



Professional - Quality - Benefit

B008 Torque Arm - TAW

			Max. Torque [Nm]		Max. Load	Ver. Stroke	Max. Reach R	Height H	Output Width W
Model	Description	Installation	Ver.	Hor.	[Kg]	[mm]	[mm]	[mm]	[mm]
Basic									
YBA-B008-TA025W1	Basic-Ecn	Table Mounting	25	20	4	600	550	1028	20
YBA-B008-TA025W2	Basic-Adv	Table Mounting	25	20	2.5	500	550	1036	20
YBA-B008-TA025WT1	Basic-Ecn	Top Mounting	25	20	4	600	550	900	20
YBA-B008-TA025WT2	Basic-Adv	Top Mounting	25	20	2.5	500	550	900	20
YBA-B008-TA025W1-3D	Basic-Ecn	Wall Mounting	25	20	4	210	770	715	20
YBA-B008-TA025W2-3D	Basic-Adv	Wall Mounting	25	20	2.5	210	770	715	20
YBA-B008-TA050W1	Basic-Ecn	Table Mounting	50	35	9	500	830	1039	28
YBA-B008-TA050W2	Basic-Adv	Table Mounting	50	35	5.5	500	830	1034	28
YBA-B008-TA050WT1	Basic-Ecn	Top Mounting	50	35	9	500	830	900	28
YBA-B008-TA050WT2	Basic-Adv	Top Mounting	50	35	5.5	500	830	900	28
YBA-B008-TA100W1	Basic-Ecn	Table Mounting	100	60	8	500	850	1041	28
YBA-B008-TA100W2	Basic-Adv	Table Mounting	100	60	6.5	500	850	1046	28
YBA-B008-TA100WT1	Basic-Ecn	Top Mounting	100	60	8	500	850	900	28
YBA-B008-TA100WT2	Basic-Adv	Top Mounting	100	60	6.5	500	850	900	28
YBA-B008-TA200W1	Basic-Ecn	Table Mounting	200	120	19	500	1030	1186	40
YBA-B008-TA200WT1	Basic-Adv	Top Mounting	200	120	19	500	1030	900	40
TPS Positioning Arm, X/Y									
YBA-B008-TA025W-P1	TPS-Ecn	Table Mounting	25	20	4	600	550	1056	20
YBA-B008-TA025W-P2	TPS-Adv	Table Mounting	25	20	2.5	600	550	1095	20
YBA-B008-TA025WT-P1	TPS-Ecn	Top Mounting	25	20	4	600	550	900	20
YBA-B008-TA025WT-P2	TPS-Adv	Top Mounting	25	20	2.5	600	550	900	20
YBA-B008-TA025W1-P3D	TPS-Ecn	Wall Mounting	25	20	4	210	770	715	20
YBA-B008-TA025W2-P3D	TPS-Adv	Wall Mounting	25	20	2.5	210	770	715	20
YBA-B008-TA050W-P1	TPS-Ecn	Table Mounting	50	35	9	500	830	1067	28
YBA-B008-TA050W-P2	TPS-Adv	Table Mounting	50	35	5.5	500	830	1095	28
YBA-B008-TA050WT-P1	TPS-Ecn	Top Mounting	50	35	9	500	830	900	28
YBA-B008-TA050WT-P2	TPS-Adv	Top Mounting	50	35	5.5	500	830	900	28
YBA-B008-TA100W-P1	TPS-Ecn	Table Mounting	100	60	8	500	850	1072	28
YBA-B008-TA100W-P2	TPS-Adv	Table Mounting	100	60	6.5	500	850	1095	28
YBA-B008-TA100WT-P1	TPS-Ecn	Top Mounting	100	60	8	500	850	900	28
YBA-B008-TA100WT-P2	TPS-Adv	Top Mounting	100	60	6.5	500	850	900	28
YBA-B008-TA200W-P1	TPS-Ecn	Table Mounting	200	120	19	500	1030	1245	40
YBA-B008-TA200WT-P1	TPS-Adv	Top Mounting	200	120	19	500	1030	900	40



High-Tech Enterprise



烨柏®



Professional - Quality - Benefit

B008 Torque Arm - TAW

Model	Description	Installation	Max. Torque [Nm]		Max. Load	Ver. Stroke	Max. Reach R	Height H	Output Width W
			Ver.	Hor.	[Kg]	[mm]	[mm]	[mm]	[mm]
TPS Positioning Arm, X/Y/Z									
YBA-B008-TA025W-ZP1	TPS-Ecn	Table Mounting	25	20	4	600	550	1056	20
YBA-B008-TA025W-ZP2	TPS-Adv	Table Mounting	25	20	2.5	600	550	1095	20
YBA-B008-TA025WT-ZP1	TPS-Ecn	Top Mounting	25	20	4	600	550	900	20
YBA-B008-TA025WT-ZP2	TPS-Adv	Top Mounting	25	20	2.5	600	550	900	20
YBA-B008-TA025W1-ZP3D	TPS-Ecn	Wall Mounting	25	20	4	210	770	715	20
YBA-B008-TA025W2-ZP3D	TPS-Adv	Wall Mounting	25	20	2.5	210	770	715	20
YBA-B008-TA050W-ZP1	TPS-Ecn	Table Mounting	50	35	9	500	830	1067	28
YBA-B008-TA050W-ZP2	TPS-Adv	Table Mounting	50	35	5.5	500	830	1095	28
YBA-B008-TA050WT-ZP1	TPS-Ecn	Top Mounting	50	35	9	500	830	900	28
YBA-B008-TA050WT-ZP2	TPS-Adv	Top Mounting	50	35	5.5	500	830	900	28
YBA-B008-TA100W-ZP1	TPS-Ecn	Table Mounting	100	60	8	500	850	1072	28
YBA-B008-TA100W-ZP2	TPS-Adv	Table Mounting	100	60	6.5	500	850	1095	28
YBA-B008-TA100WT-ZP1	TPS-Ecn	Top Mounting	100	60	8	500	850	900	28
YBA-B008-TA100WT-ZP2	TPS-Adv	Top Mounting	100	60	6.5	500	850	900	28
YBA-B008-TA200W-ZP1	TPS-Ecn	Table Mounting	200	120	19	500	1030	1245	40
YBA-B008-TA200WT-ZP1	TPS-Adv	Top Mounting	200	120	19	500	1030	900	40

Notice:

1. Economic type equipped with Chinese local brand balancer and bearing. Advanced type equipped with international brand balancer and bearing
2. The standard model torque arms are left articulated. Please tell Yebo sales if you need right articulated
3. The encoders equipped on the TPS positioning arm can be analog or digital output. If analog, controlled by YBA-SPC-COM-ST012M. If digital, controlled by YBA-SPC-COM-ST012S.



Left Articulated
For left hand operate



Right Articulated
For right hand operate






High-Tech Enterprise



Professional - Quality - Benefit

B008 Torque Arm - TAW

Table Mounting

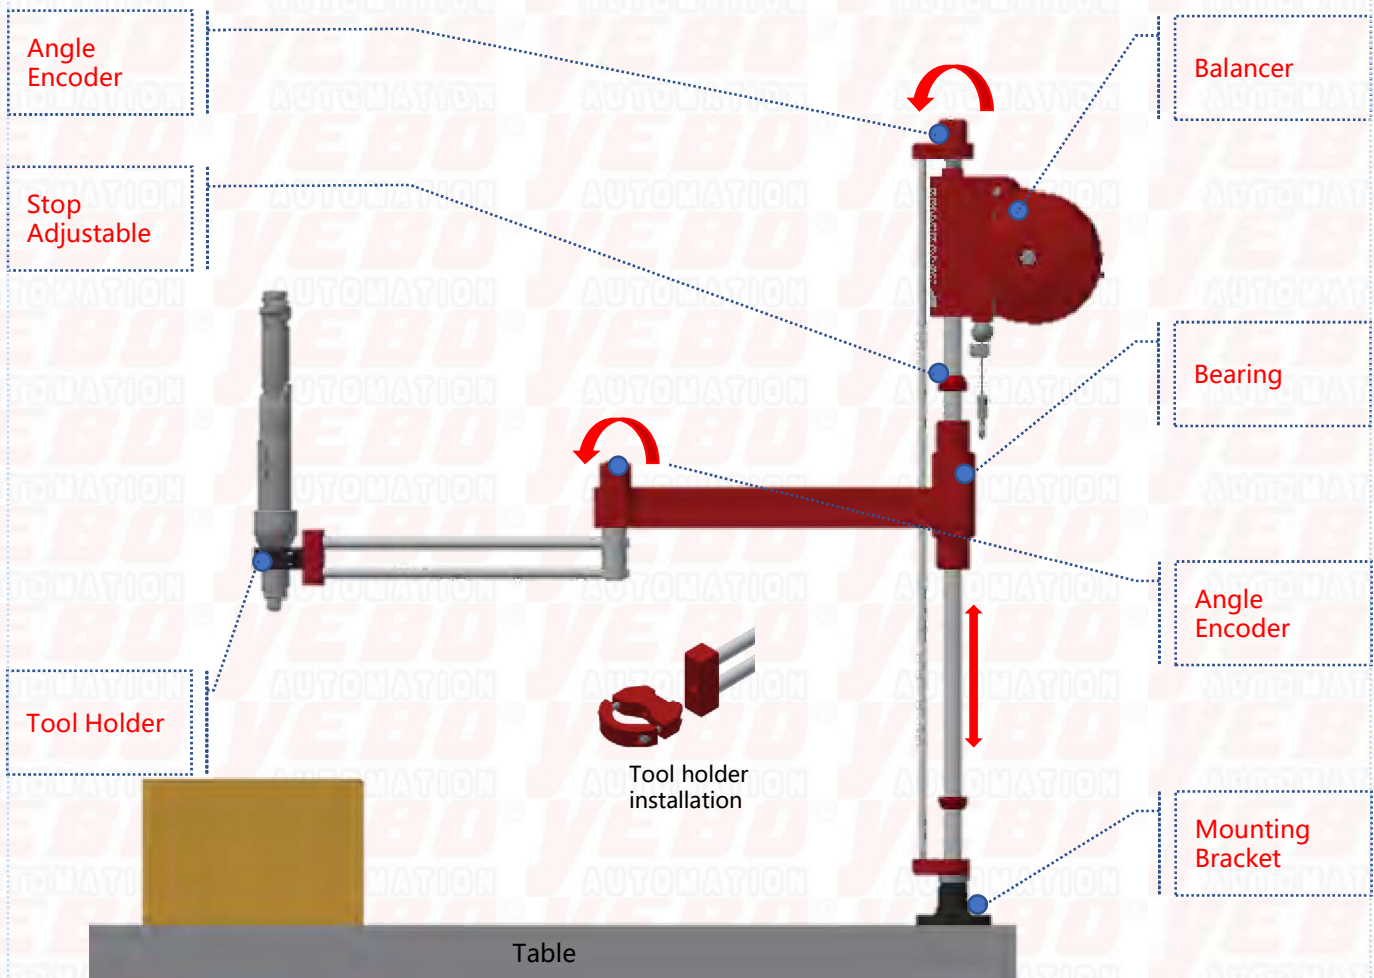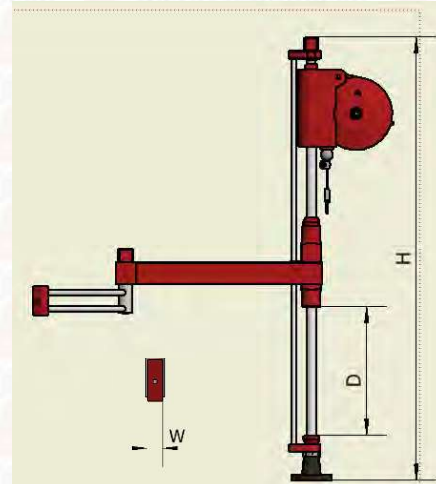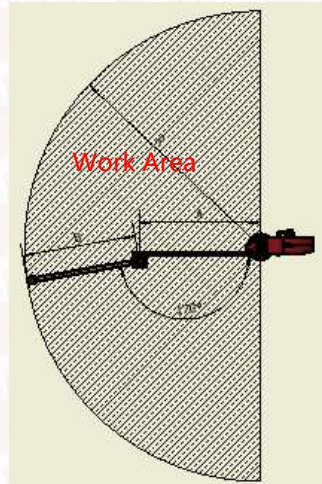



YBA®
焜柏®

YEBO®
AUTOMATION



High-Tech Enterprise



Professional - Quality - Benefit

B008 Torque Arm- C

C Series Carbon Articulated Arm

The arm is made from Carbon, so it is very light and easily control. Special for the customers come from electronic field.



Basic



TPS Position

Patent Certificate

Number:

ZL201430313796.7

ZL201520628070.1

ZL201530075203.2

ZL201530310759.5

ZL201630486987.2

ZL201630475999.5





High-Tech Enterprise



烨柏®



Professional - Quality - Benefit

B008 Torque Arm- C

Model	Description	Max. Torque [Nm]		Max. Load [Kg]	Ver. Stroke D [mm]	Max. Reach R [mm]	Height H [mm]	Output Width W [mm]
		Ver.	Hor.					
Basic								
YBA-B008-010C	Basic-Adv	10		2	400	480	772	17 x17
YBA-B008-010CJ	Basic-Ecn	10		2	400	480	772	17 x17
YBA-B008-040C	Basic-Adv	40		2.5	500	590	1036	20 x 20
YBA-B008-040CJ	Basic-Ecn	40		2.5	500	590	1036	20 x 20
YBA-B008-080C	Basic-Adv	80		4	500	680	1086	28 x 28
YBA-B008-080CJ	Basic-Ecn	80		4	500	680	1086	28 x 28
YBA-B008-150C	Basic-Adv	150		7	500	800	1186	30 x 30
YBA-B008-150CJ	Basic-Ecn	150		7	500	800	1186	30 x 30
YBA-B008-150C-R1300	Basic-Adv	150		6	500	1300	1186	30 x 30
YBA-B008-150CJ-R1300	Basic-Ecn	150		6	500	1300	1245	30 x 30
TPS Positioning Arm, X/Y								
YBA-B008-010PC	Basic-Adv	10		2	400	480	772	17 x17
YBA-B008-010PCJ	Basic-Ecn	10		2	400	480	772	17 x17
YBA-B008-040PC	Basic-Adv	40		2.5	500	590	1075	20 x 20
YBA-B008-040PCJ	Basic-Ecn	40		2.5	500	590	1075	20 x 20
YBA-B008-080PC	Basic-Adv	80		4	500	680	1145	28 x 28
YBA-B008-080PCJ	Basic-Ecn	80		4	500	680	1145	28 x 28
YBA-B008-150PC	Basic-Adv	150		7	500	800	1186	30 x 30
YBA-B008-150PCJ	Basic-Ecn	150		7	500	800	1186	30 x 30
YBA-B008-150PC-R1300	Basic-Adv	150		6	500	1300	1186	30 x 30
YBA-B008-150PCJ-R1300	Basic-Ecn	150		6	500	1300	1245	30 x 30
TPS Positioning Arm, X/Y/Z								
YBA-B008-010ZPC	Basic-Adv	10		2	400	480	772	17 x17
YBA-B008-010ZPCJ	Basic-Ecn	10		2	400	480	772	17 x17
YBA-B008-040ZPC	Basic-Adv	40		2.5	500	590	1075	20 x 20
YBA-B008-040ZPCJ	Basic-Ecn	40		2.5	500	590	1075	20 x 20
YBA-B008-080ZPC	Basic-Adv	80		4	500	680	1145	28 x 28
YBA-B008-080ZPCJ	Basic-Ecn	80		4	500	680	1145	28 x 28
YBA-B008-150ZPC	Basic-Adv	150		7	500	800	1186	30 x 30
YBA-B008-150ZPCJ	Basic-Ecn	150		7	500	800	1186	30 x 30
YBA-B008-150ZPC-R1300	Basic-Adv	150		6	500	1300	1186	30 x 30
YBA-B008-150ZPCJ-R1300	Basic-Ecn	150		6	500	1300	1245	30 x 30

Notice:

1. Economic type equipped with Chinese local brand balancer and bearing. Advanced type equipped with international brand balancer and bearing
2. The standard model torque arms are left articulated. Please tell Yebo sales if you need right articulated
3. The encoders equipped on the TPS positioning arm can be analog or digital output. If analog, controlled by YBA-SPC-COM-ST012M. If digital, controlled by YBA-SPC-COM-ST012S.



Left Articulated
For left hand operate



Right Articulated
For right hand operate





High-Tech Enterprise



Professional - Quality - Benefit

B008 Torque Arm- C

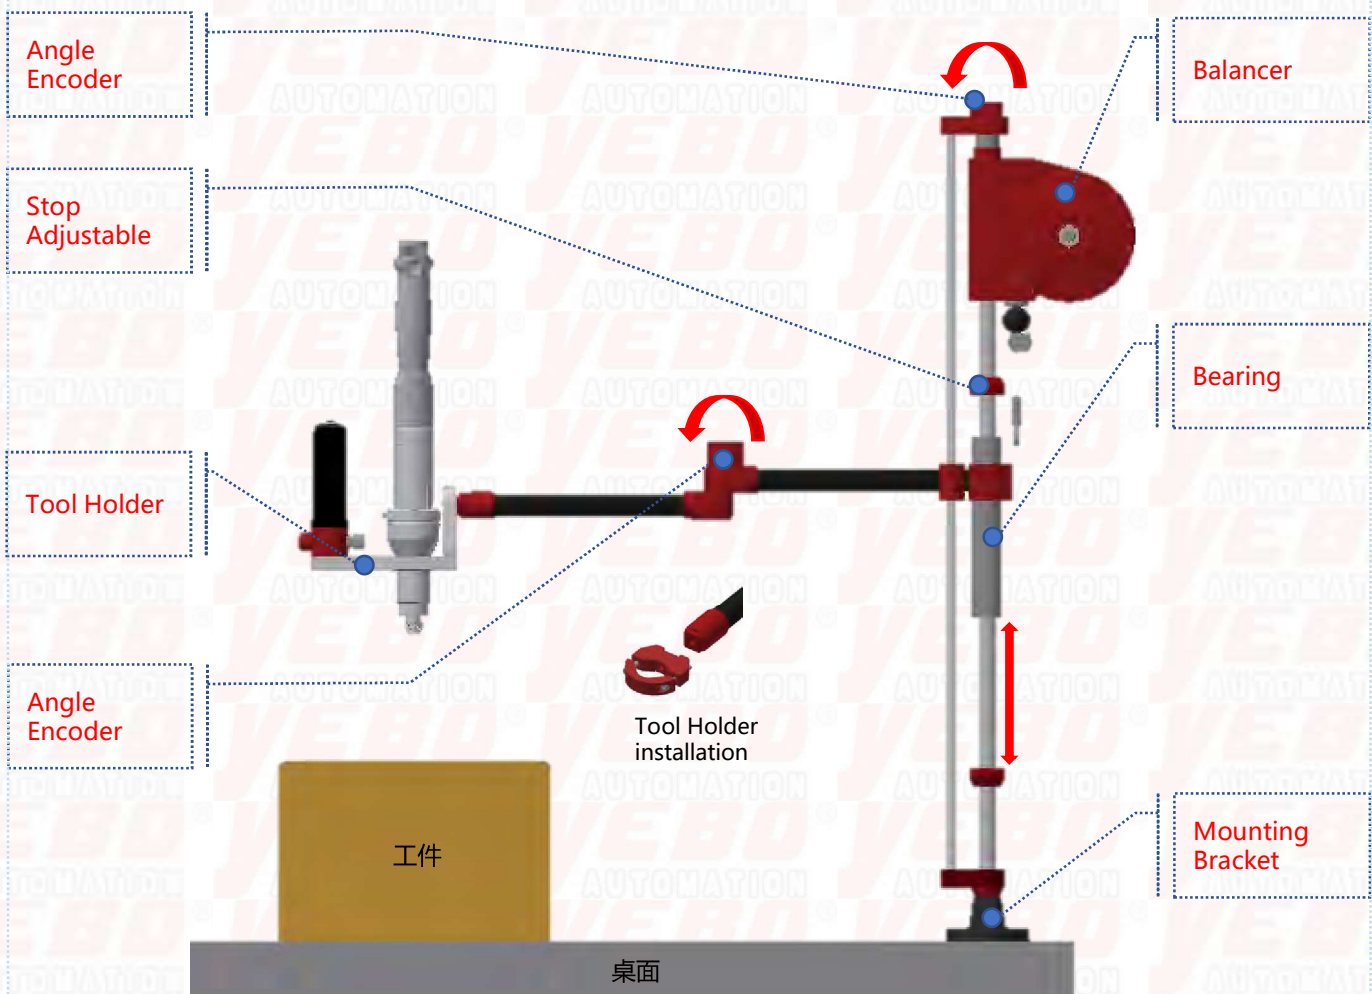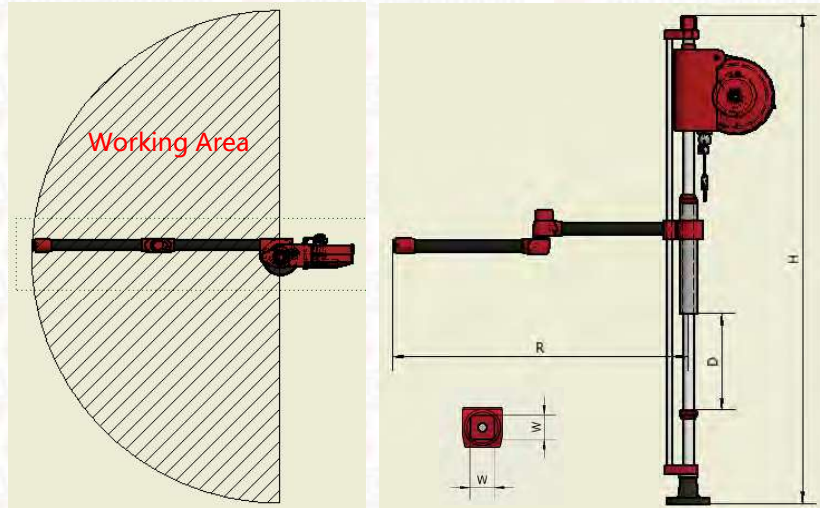



High-Tech Enterprise



烨柏®





Professional - Quality - Benefit

B008 Torque Arm- 100Y

100Y Series Articulated Arm

The arm is made from Carbon, so it is very light and easily control. Equipped with air cylinder for balance adjustable.

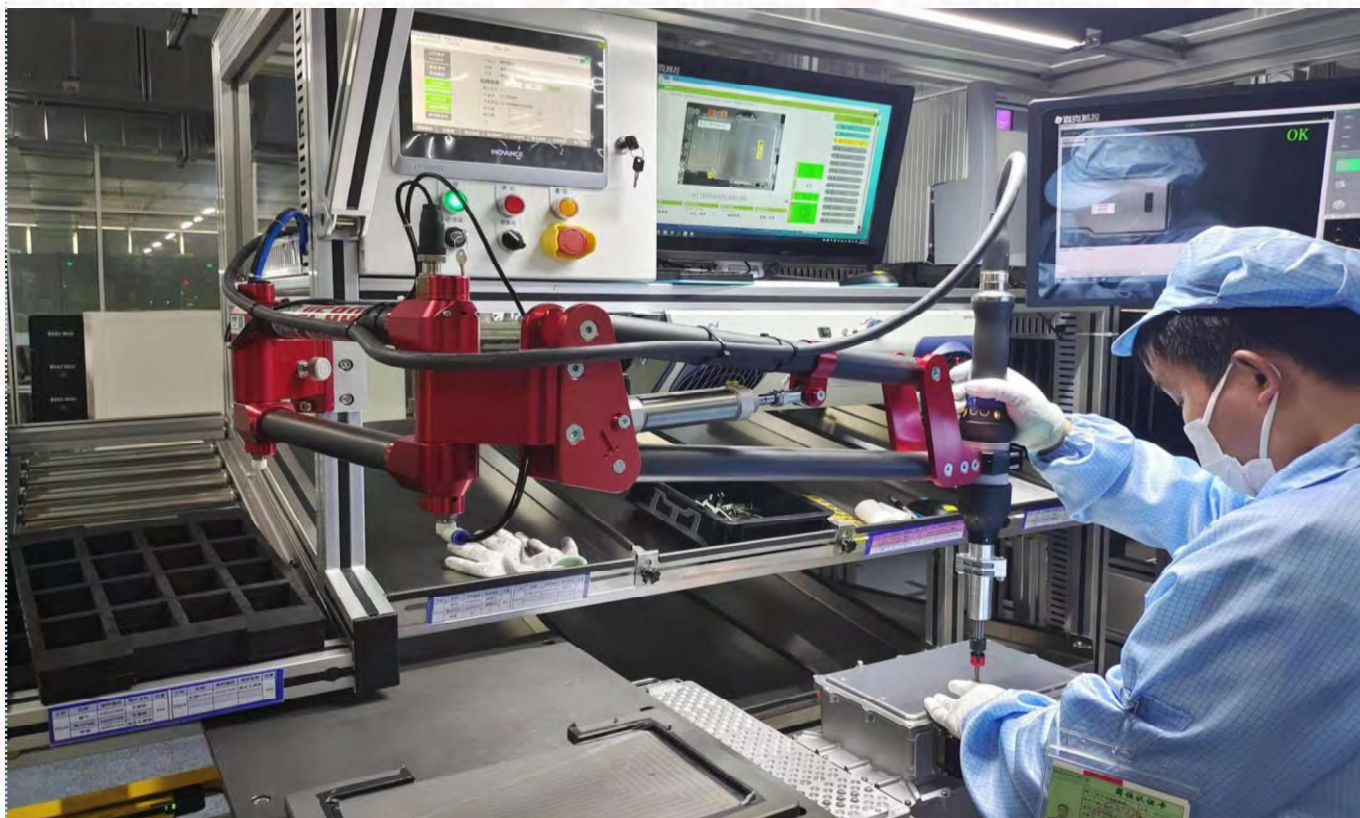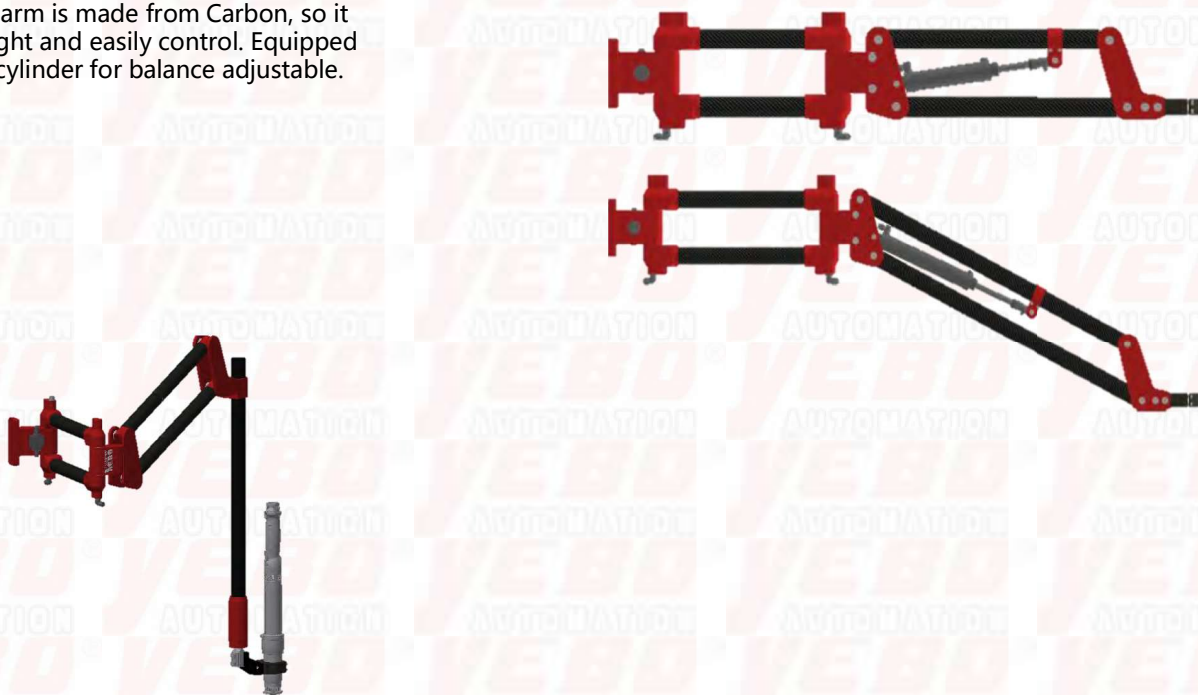



High-Tech Enterprise



烨柏®



Professional - Quality - Benefit

B008 Torque Arm- 100Y

Model	Description	Max. Torque[Nm]		Max. Load [Kg]	Length Arm A	Length Arm B	Max. Reach R	Ver. Stroke H	Dia. Hold (General)
		Ver.	Hor.		[mm]	[mm]	[mm]	[mm]	[mm]
Basic									
YBA-B008-100Y-L200-300	Left Articulated	100		10	200	300	700	180	30 - 55
YBA-B008-100Y-R200-300	Right Articulated	100		10	200	300	700	180	30 - 55
YBA-B008-100Y-L300-300	Left Articulated	100		10	300	300	800	180	30 - 55
YBA-B008-100Y-R300-300	Right Articulated	100		10	300	300	800	180	30 - 55
YBA-B008-100Y-L300-400	Left Articulated	100		10	300	400	900	300	30 - 55
YBA-B008-100Y-R300-400	Right Articulated	100		10	300	400	900	300	30 - 55
YBA-B008-100Y-L400-300	Left Articulated	100		10	400	300	1000	300	30 - 55
YBA-B008-100Y-R400-300	Right Articulated	100		10	400	300	1000	300	30 - 55
YBA-B008-100Y-L400-400	Left Articulated	100		10	400	400	1000	300	30 - 55
YBA-B008-100Y-R400-400	Right Articulated	100		10	400	400	1000	300	30 - 55
YBA-B008-100Y-L400-500	Left Articulated	100		10	400	500	1100	400	30 - 55
YBA-B008-100Y-R400-500	Right Articulated	100		10	400	500	1100	400	30 - 55
YBA-B008-100Y-L500-400	Left Articulated	100		10	500	400	1100	300	30 - 55
YBA-B008-100Y-R500-400	Right Articulated	100		10	500	400	1100	300	30 - 55
YBA-B008-100Y-L500-500	Left Articulated	100		10	500	500	1200	400	30 - 55
YBA-B008-100Y-R500-500	Right Articulated	100		10	500	500	1200	400	30 - 55
TPS Positioning Arm, X/Y									
YBA-B008-100Y-PL200-300	Left Articulated	100		10	200	300	700	180	30 - 55
YBA-B008-100Y-PR200-300	Right Articulated	100		10	200	300	700	180	30 - 55
YBA-B008-100Y-PL300-300	Left Articulated	100		10	300	300	800	180	30 - 55
YBA-B008-100Y-PR300-300	Right Articulated	100		10	300	300	800	180	30 - 55
YBA-B008-100Y-PL300-400	Left Articulated	100		10	300	400	900	300	30 - 55
YBA-B008-100Y-PR300-400	Right Articulated	100		10	300	400	900	300	30 - 55
YBA-B008-100Y-PL400-300	Left Articulated	100		10	400	300	1000	300	30 - 55
YBA-B008-100Y-PR400-300	Right Articulated	100		10	400	300	1000	300	30 - 55
YBA-B008-100Y-PL400-400	Left Articulated	100		10	400	400	1000	300	30 - 55
YBA-B008-100Y-PR400-400	Right Articulated	100		10	400	400	1000	300	30 - 55
YBA-B008-100Y-PL400-500	Left Articulated	100		10	400	500	1100	400	30 - 55
YBA-B008-100Y-PR400-500	Right Articulated	100		10	400	500	1100	400	30 - 55
YBA-B008-100Y-PL500-400	Left Articulated	100		10	500	400	1100	300	30 - 55
YBA-B008-100Y-PR500-400	Right Articulated	100		10	500	400	1100	300	30 - 55
YBA-B008-100Y-PL500-500	Left Articulated	100		10	500	500	1200	400	30 - 55
YBA-B008-100Y-PR500-500	Right Articulated	100		10	500	500	1200	400	30 - 55

Model Key:

YBA - B008 - 100Y - P R 300 - 400 - T20

Transducer	Articulated	Arm A L.	Arm B L.	Tool Holder
Blank -> No	R -> Right	150 -> 150mm	300 -> 300mm	Blank -> General
P -> X/Y	L -> Left	200 -> 200mm	400 -> 400mm	T20 -> Output 20mm
ZP -> X/Y/Z		250 -> 250mm	500 -> 400mm	T28 -> Output 28mm
		300 -> 300mm		L400 -> Z Length 400mm
		400 -> 400mm		L800 -> Z Length 800mm
		500 -> 400mm		



Left Articulated
For left hand operate

Right Articulated
For right hand operate





High-Tech Enterprise



Professional - Quality - Benefit

B008 Torque Arm- 100Y

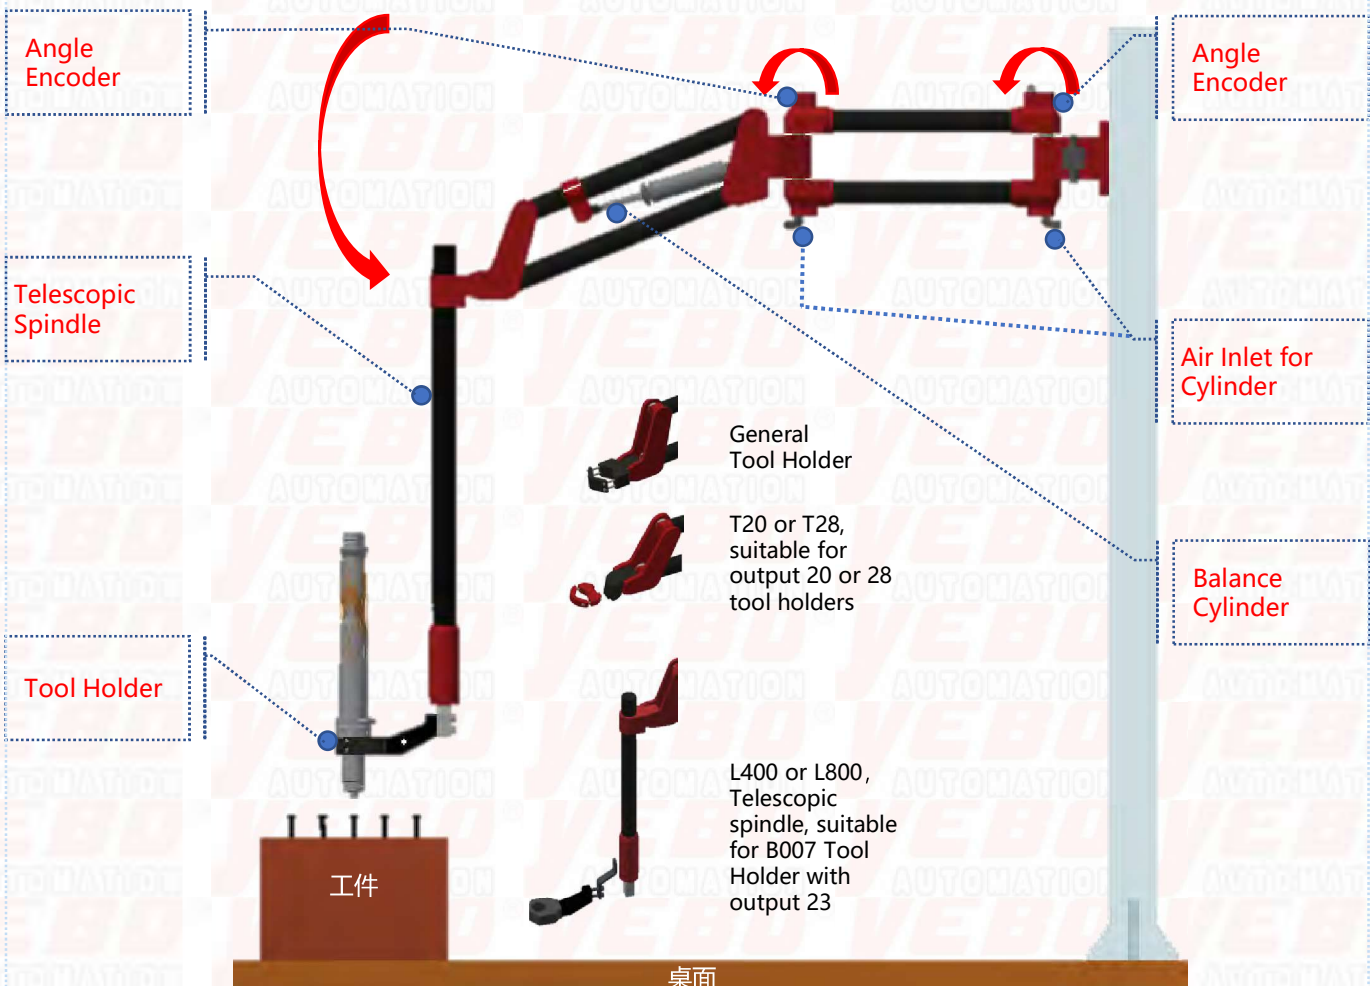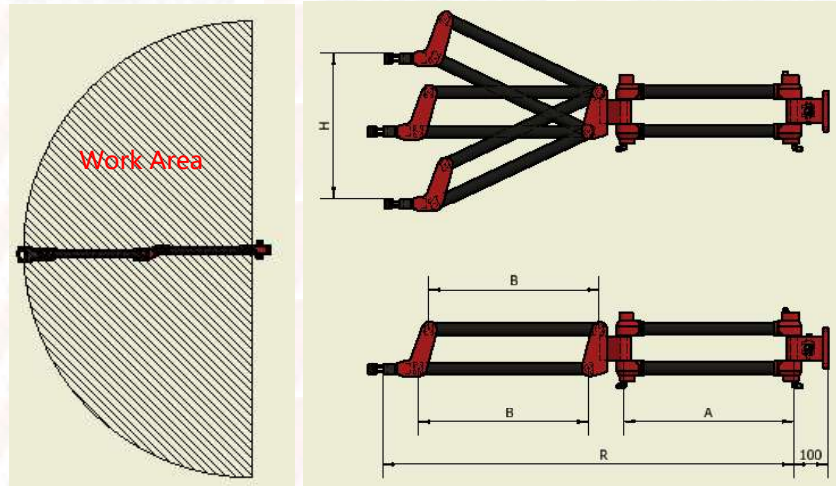



High-Tech Enterprise



Professional - Quality - Benefit

B008 Torque Arm- LA

LA Series Large Reach Articulated Arm

The arm is made from Carbon, so it is very light and easily control. The max. reach can up to be 2000mm



Wall Mounting



Top Mounting



Column Mounting





High-Tech Enterprise



烨柏®



Professional - Quality - Benefit

B008 Torque Arm- LA

Model	Description	Ver. Max. Torque [Nm]	Max. Load [Kg]	Max. Reach R [mm]	Length Z [mm]	Vertical Stroke H [mm]	Bending	Mounting	Output Width [mm]
Basic									
YBA-B008-LA-L1000L-H400-Z600	Low Load	100	10	1000	600	400	Left	Column Mounting	28
YBA-B008-LA-R1000L-H400-Z600	Low Load	100	10	1000	600	400	Right	Column Mounting	28
YBA-B008-LA-L1500L-H400-Z600	Low Load	100	10	1500	600	400	Left	Column Mounting	28
YBA-B008-LA-R1500L-H400-Z600	Low Load	100	10	1500	600	400	Right	Column Mounting	28
YBA-B008-LAH-L2000L-H400-Z600	High Load	100	10	2000	600	400	Left	Column Mounting	28
YBA-B008-LAH-R2000L-H400-Z600	High Load	100	10	2000	600	400	Right	Column Mounting	28
YBA-B008-LA-L1000T-H400-Z600	Low Load	100	10	1000	600	400	Left	Top Mounting	28
YBA-B008-LA-R1000T-H400-Z600	Low Load	100	10	1000	600	400	Right	Top Mounting	28
YBA-B008-LA-L1500T-H400-Z600	Low Load	100	10	1500	600	400	Left	Top Mounting	28
YBA-B008-LA-R1500T-H400-Z600	Low Load	100	10	1500	600	400	Right	Top Mounting	28
YBA-B008-LAH-L2000T-H400-Z600	High Load	100	10	2000	600	400	Left	Top Mounting	28
YBA-B008-LAH-R2000T-H400-Z600	High Load	100	10	2000	600	400	Right	Top Mounting	28
YBA-B008-LA-L1000C-H400-Z600	Low Load	100	10	1000	600	400	Left	Wall Mounting	28
YBA-B008-LA-R1000C-H400-Z600	Low Load	100	10	1000	600	400	Right	Wall Mounting	28
YBA-B008-LA-L1500C-H400-Z600	Low Load	100	10	1500	600	400	Left	Wall Mounting	28
YBA-B008-LA-R1500C-H400-Z600	Low Load	100	10	1500	600	400	Right	Wall Mounting	28
YBA-B008-LAH-L2000C-H400-Z600	High Load	100	10	2000	600	400	Left	Wall Mounting	28
YBA-B008-LAH-R2000C-H400-Z600	High Load	100	10	2000	600	400	Right	Wall Mounting	28
TPS Positioning Arm, X/Y									
YBA-B008-LAP-L1000L-H400-Z600	Low Load	100	10	1000	600	400	左	Column Mounting	28
YBA-B008-LAP-R1000L-H400-Z600	Low Load	100	10	1000	600	400	右	Column Mounting	28
YBA-B008-LAP-L1500L-H400-Z600	Low Load	100	10	1500	600	400	左	Column Mounting	28
YBA-B008-LAP-R1500L-H400-Z600	Low Load	100	10	1500	600	400	右	Column Mounting	28
YBA-B008-LAHP-L2000L-H400-Z600	High Load	100	10	2000	600	400	左	Column Mounting	28
YBA-B008-LAHP-R2000L-H400-Z600	High Load	100	10	2000	600	400	右	Column Mounting	28
YBA-B008-LAP-L1000T-H400-Z600	Low Load	100	10	1000	600	400	左	Top Mounting	28
YBA-B008-LAP-R1000T-H400-Z600	Low Load	100	10	1000	600	400	右	Top Mounting	28
YBA-B008-LAP-L1500T-H400-Z600	Low Load	100	10	1500	600	400	左	Top Mounting	28
YBA-B008-LAP-R1500T-H400-Z600	Low Load	100	10	1500	600	400	右	Top Mounting	28
YBA-B008-LAP-L2000T-H400-Z600	High Load	100	10	2000	600	400	左	Top Mounting	28
YBA-B008-LAHP-R2000T-H400-Z600	High Load	100	10	2000	600	400	右	Top Mounting	28
YBA-B008-LAP-L1000C-H400-Z600	Low Load	100	10	1000	600	400	左	Wall Mounting	28
YBA-B008-LAP-R1000C-H400-Z600	Low Load	100	10	1000	600	400	右	Wall Mounting	28
YBA-B008-LAP-L1500C-H400-Z600	Low Load	100	10	1500	600	400	左	Wall Mounting	28
YBA-B008-LAP-R1500C-H400-Z600	Low Load	100	10	1500	600	400	右	Wall Mounting	28
YBA-B008-LAHP-L2000C-H400-Z600	High Load	100	10	2000	600	400	左	Wall Mounting	28
YBA-B008-LAHP-R2000C-H400-Z600	High Load	100	10	2000	600	400	右	Wall Mounting	28

Model Key:

YBA - B008 - LA H P - R 1500 L2000 - Z600 H400

Arm	Transducer	Arti.	Max. Reach	Install	Z Length	Z stroke
Blank ->	Blank -> No	R -> Right	1000 -> 1000mm	C -> Side	400 -> 400mm	300 -> 300mm
light load	P -> X/Y	L -> Left	1250 -> 1250mm	L -> Col.	600 -> 600mm	400 -> 400mm
H -> High	LP -> X/Y/Z		1500 -> 1500mm	1500mm	800 -> 800mm	500 -> 500mm
load			1750 -> 1750mm	1750mm		
			2000 -> 2000mm	2000mm		
				2250mm		
				2500mm		
				T -> Top		



Left Articulated
For left hand operate

Right Articulated
For right hand operate





High-Tech Enterprise



Professional - Quality - Benefit

B008 Torque Arm- LA

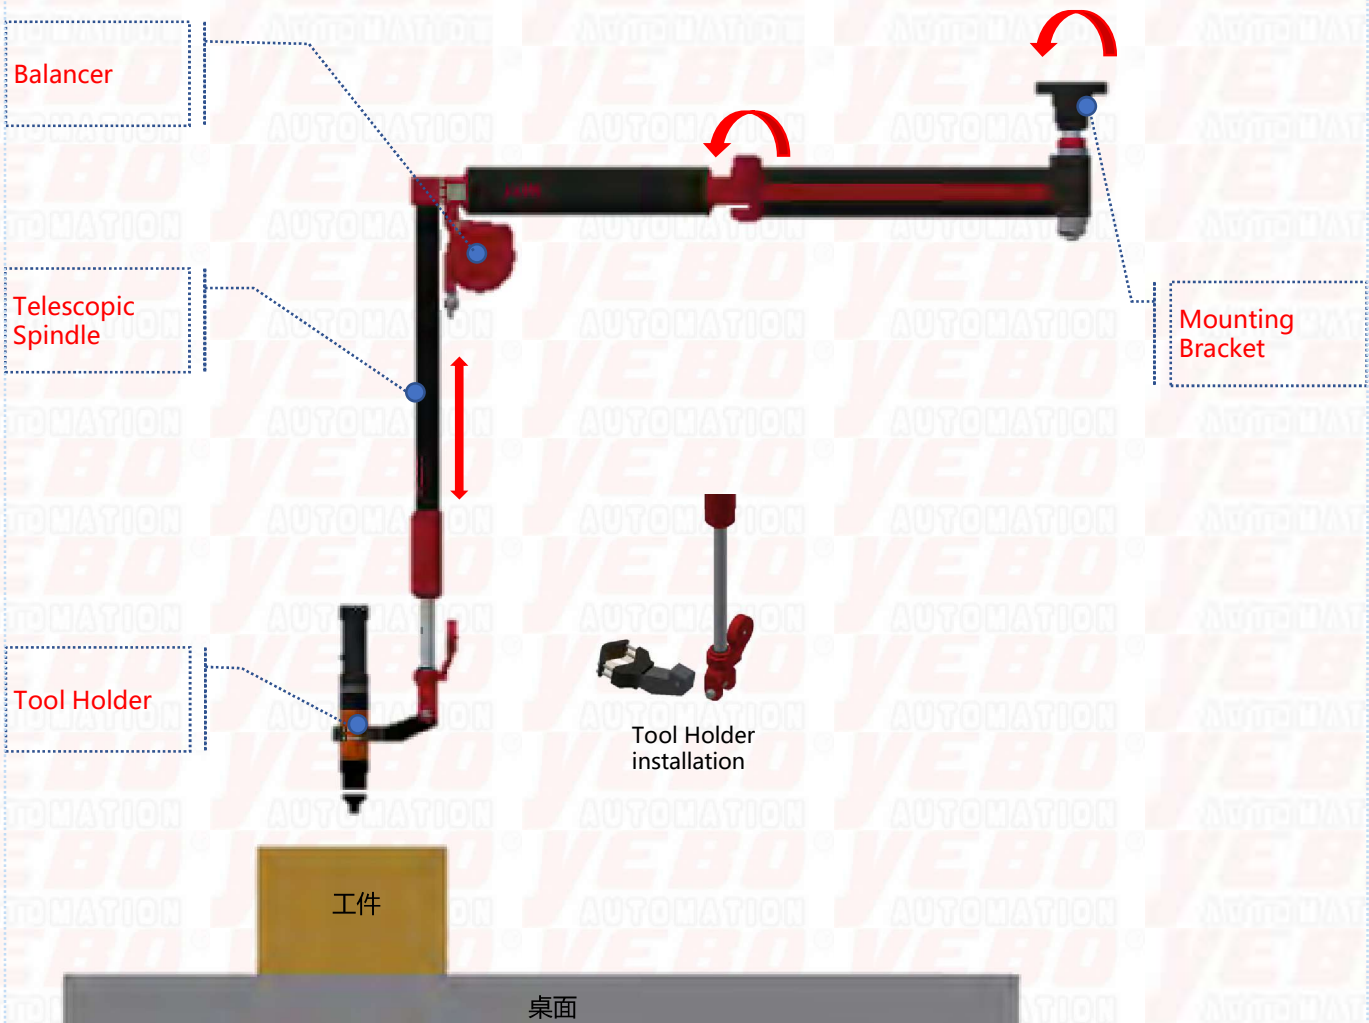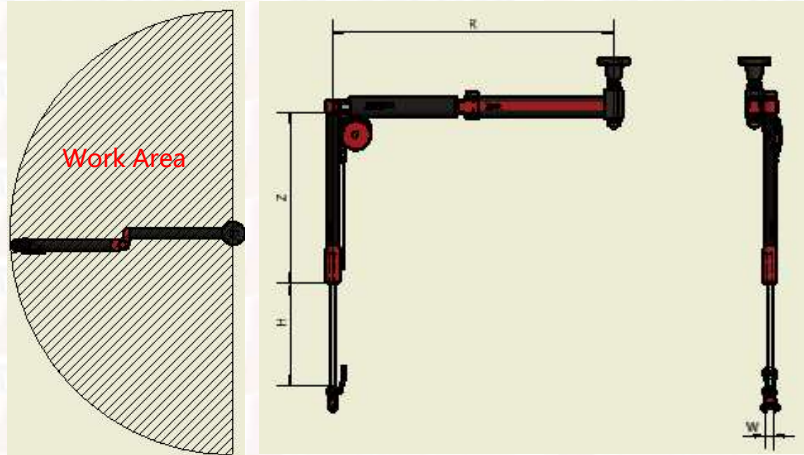



High-Tech Enterprise



烨柏®



Professional - Quality - Benefit

B008 Torque Arm

Application



Screws on top




Screws on side




Screws on top



Screws on side

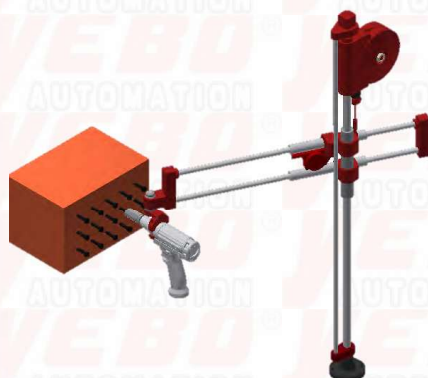

Screws on side

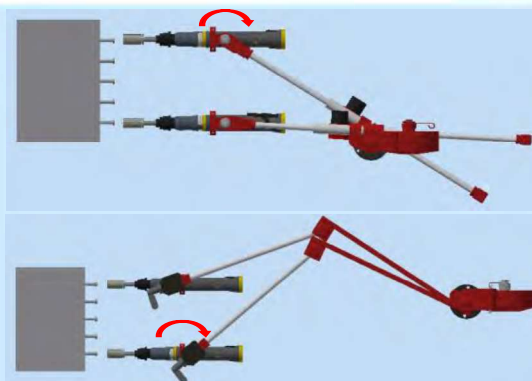

Notice: must equipped with swiveling tool holder when tighten the screws on the side



High-Tech Enterprise



烨柏®







Professional - Quality - Benefit


B008 Tool Holder

General

							
Universal: YBA-B008-J001		Universal: YBA-B008-J001D		Universal: YBA-B008-J001T		Universal: YBA-B008-J001DT	
Tool Dia: 25-40mm	Arm Output: 20mm	Tool Dia: 27-50mm	Arm Output: 20mm	Tool Dia: 25-40mm	Arm Output: 20mm	Tool Dia: 27-50mm	Arm Output: 20mm

							
Universal: YBA-B008-J002		Quick Change: YBA-B008-JK001		Swiveling: YBYBA-B008-FAA-		Swiveling & Universal: YBA-B008-M129	
Tool Dia: 30-55mm	Arm Output: 28mm	Tool Dia: 27-50mm	Arm Output: 20mm	Tool Dia: Upon tool model	Arm Output: 20mm/28mm	Tool Dia: 25-40mm	Arm Output: 20mm

							
Swiveling: YBA-B008-FSD-		Swiveling: YBA-B008-FS2-		Swiveling & Universal: YBA-B008-M129 : YBA-B008-J006-150_620		Swiveling & Universal: YBA-B008-M129 : YBA-B008-M90-L087	
Tool Dia: Upon tool model	Arm Output: 28mm	Tool Dia: Upon tool model	Arm Output: 28mm	Tool Dia: Upon tool model	Arm Output: 40mm	Tool Dia: 25-40mm	Arm Output: 20mm

							
Swiveling & Universal: YBA-B008-M129 : YBA-B008-FS2B-J003		Swiveling & Universal: YBA-B008-M129 Swiveling: YBA-B008-2AJ001		Universal: YBA-B008-J004-W050		Swiveling & Universal: YBA-B008-M129 : YBA-B008-J006-150	
Tool Dia: 30-55mm	Arm Output: 28mm	Tool Dia: 30-55mm	Arm Output: 28mm	Tool Dia: 30-55mm	Arm Output: 28mm	Tool Dia: 30-55mm	Arm Output: 40mm



High-Tech Enterprise



烨柏®



Professional - Quality - Benefit

B008 Tool Holder

General

Swiveling & Universal: YBA-B008-M129 : YBA-B008-FS2B-150		Swiveling & Universal: YBA-B008-M129 : YEBO-D-B008-M90-L180		Single Handle: YBA-B008-J004-Tool Model		Double Handle: YBA-B008-J006-350	
Tool Dia: 30-55mm	Arm Output: 40mm	Tool Dia: 25-40mm	Arm Output: 20mm	Tool Dia: Upon tool model	Arm Output: 20mm	Tool Dia: Upon tool model	Arm Output: 50mm
Double Handle: YBA-B008-Tool Model		Double Handle: YBA-B008-J006-080-Tool Model		Double Handle: YBA-B008-F2A-Tool Model		Double Handle: YBA-B008-2S-Tool Model	
Tool Dia: Upon tool model	Arm Output: 50mm	Tool Dia: Upon tool model	Arm Output: 32mm	Tool Dia: Upon tool model	Arm Output: 50mm	Tool Dia: Upon tool model	Arm Output: 32mm
Universal: YBA-B008-LA-C001		Universal: YBA-B008-J002-LA		Swiveling & Universal: YBA-B008-M129 : YBA-B009-LA-C302-L087			
Tool Dia: 23-45mm	Arm: LA	Tool Dia: 30-55mm	Arm: LA	Tool Dia: 25-40mm	Arm: LA		

Stand

Stand: YBA-B008-LZ01-Lxxx (xxx is Height)		Stand: YBA-B008-LZ02-Lxxx (xxx is Height)		立柱: YBA-B008-LZ03-Lxxx (xxx is Height)			
Arm: below 150Nm		Arm: 150 to 500Nm		Arm: 1000Nm			



High-Tech Enterprise



烨柏®



Professional - Quality - Benefit

B008 Tool Holder

Tool Holder special for International Brand Tools

ATLAS COPCO		ATLAS COPCO		ATLAS COPCO		ATLAS COPCO	
Single Handle: YBA-B008-J004-QST34		Double Handle: YBA-B008-QST62		Double Handle: YBA-B008-QST80		Double Handle: YBA-B008-T2-150B	
Tool: QST34	Arm Output: 28mm	Tool: QST62	Arm Output: 50mm	Tool: QST80	Arm Output: 50mm	Tool: ETD ST101-150	Arm Output 40mm
BoschRexroth		BoschRexroth		BoschRexroth		BoschRexroth	
Single Handle: YBA-B008-J004B-BG2		Double Handle: YBA-B008-BG4-VU2		Double Handle: YBA-B008-BG4		Double Handle: YBA-B008-BG4-4W220-2	
Tool: G2	Arm Output: 28mm	Tool: VUK2D186 VUL2D290	Arm Output: 50mm	Tool: G4	Arm Output: 50mm	Tool: 4W220	Arm Output: 40mm
DDK		DDK		DDK		DDK	
Single Handle: YBA-B008-J004L-DDK-CFT401-025B		Single Handle: YBA-B008-J004-DDK-NFT201		Double Handle: YBA-B008-DDK80-150		Double Handle: YBA-B008-CFT-132	
Tool: CFT401	Arm Output: 20mm	Tool: NFT201	Arm Output: 20mm	Tool: 801RM3-S	Arm Output: 40mm	Tool: CFT-132	Arm Output: 40mm
DESOUTTER		DESOUTTER		DESOUTTER		DESOUTTER	
Double Handle: YBA-B008-J006-450-EAD280		Double Handle: YBA-B008-J006-080-EFDS51-70		Double Handle: YBA-B008-FA-EFDS80		Double Handle: YBA-B008-F2A-EFDS80	
Tool: EAD280	Arm Output: 50mm	Tool: EFDS51	Arm Output: 32mm	Tool: EFDS80	Arm Output: 50mm	Tool: EFDS80	Arm Output: 50mm

Notice: More tool holders need, please contact Yebo sales



High-Tech Enterprise



烨柏®



Professional - Quality - Benefit

B008 Tool Holder

Tool Holder special for International Brand Tools

ESTIC工具		ESTIC工具		ESTIC工具		ESTIC工具	
							
Single Handle: YBA-B008-J004-EH2-R2035-S2		Single Handle: YBA-B008-J004-EH2-R2055-S		Single Handle: YBA-B008-J004-ENRZ-TU003R-S		Double Handle: YBA-B008-ENRZ-TU020(R)S-150	
Tool: EH2-R2035-S2	Arm Output: 28mm	Tool: EH2-R2055-S	Arm Output: 28mm	Tool: ENRZ-TU003R	Arm Output: 28mm	Tool: ENRZ-TU020	Arm Output: 40mm
IR工具		IR工具		IR工具			
							
Double Handle: YBA-B008-QM7		Double Handle: YBA-B008-QE8		Double Handle: YBA-B008-QM9			
Tool: QM7	Arm Output: 40mm	Tool: QE8	Arm Output: 28mm	Tool: QM9	Arm Output: 50mm		

Notice: More tool holders need, please contact Yebo sales